

214 13" WASHABILITY CASEMENT HINGES



Casement

Part # 214-197



This larger 13" two bar casement hinge was designed for washability applications and reduction in sash sag was required. When fully opened to 90 degs. the sash moves 6.57" away from the frame to allow for easy access to the outside of the window.

These hinges are made from heavy gauge roll formed steel powder coated for rust proofing. The self cleaning, high-bridge acetal shoe provides smooth sliding with no

entanglement with screw heads on the SS track. SS track holes are counter sunk to allow the screws to sit better in the tracks.

The detach clip allows the window to be easily assembled / disassembled.

MATERIAL: 300 series stainless steel track and detach clip. Heavy gauge, powder coated cold rolled steel sash arms. Stainless steel reinforced acetal low-friction shoe. All rivets used are stainless steel.

REPLACES:


Truth 14-97 series casement hinges.

ORDERING INFORMATION:

Part No: 214-197. These hinges are sold in pairs. One pair is required for both left and right hand window.

For further information contact us at our sales office. Address given on the other side of brochure.

APPLICATION:

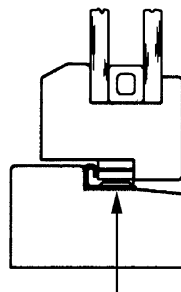


DEAL 2 Bar Hinge

Non lipped casement window application

214 13" WASHABILITY CASEMENT HINGES


FIG. 1 TWO BAR CASEMENT HINGE

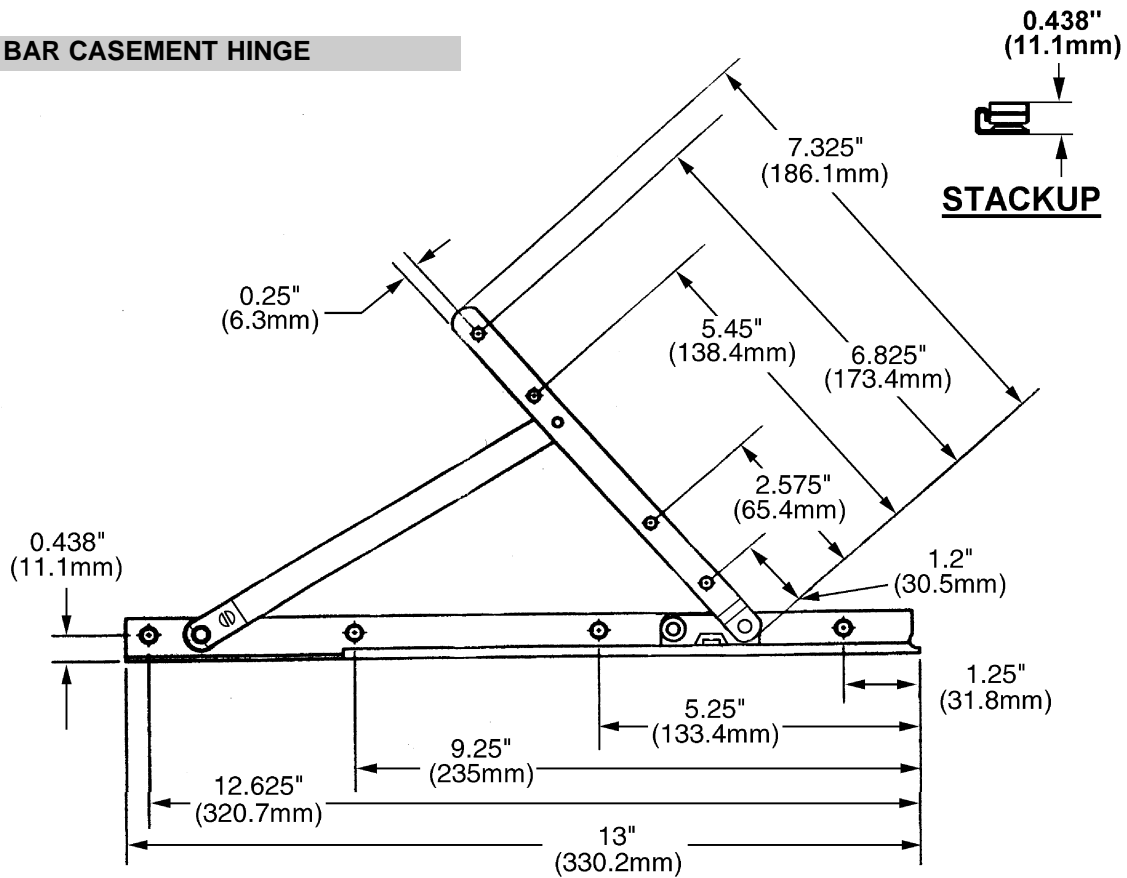

SCREWS:

TRACK: 4 PER HINGE - #7 Philips, flat head, stainless steel.
 SASH ARM: 4 PER HINGE - #7 Philips flat head, stainless steel.
 LENGTH AND THREAD TO BE DETERMINED BY PROFILE DESIGN.

FIG. 2 HINGE OPENING DIAGRAM

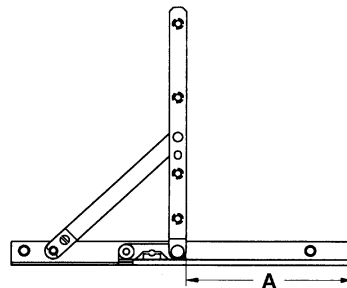

A = 6.566" - WASHABILITY



P.O. Box 10088; Rochester, NY 14610; USA
 Toll free: (888) 880-DEAL (3325)

(c) 2001 DEAL International Inc. All rights reserved.
 Suggestions of use should not be taken as inducement to infringe on patents. All specifications are subject to change without notice.