

DEALSEAL®-N300

NEUTRAL CURE, MILDEW RESISTANT
FLEXIBLE SEALANT - PROFESSIONAL GRADE.

DEAL International Inc. • P.O. Box 10088 • Rochester NY, 14610 • 585-288-4444 • Fax: 585-288-4578

PRODUCT DESCRIPTION

DEALSEAL®-N300 is an odorless, high speed curing, caulking compound that cures to for a high strength flexible rubber. It has been engineered with special features for **PROFESSIONAL, HIGH-VOLUME** glazing and installations for indoor and outdoor applications.

USES

- **Glazing** - glass to aluminum or vinyl.
- **Windows & Door Installation** - Interior & Exterior
- **Plumbing** - Bathtubs, Enclosures & Plumbing Joints
- **Gutter** - Installation & Repair
- **Kitchen & Bath** - Counter Tops & Cabinet installation
- **Siding** - installation & repair
- Excellent adhesion to: Glass, PVC, vinyl, concrete, brick, mortar, aluminum, wood, marble, granite, tile, ceramics, iron, kynar or PVC coated metals (Coil for capping), melamine and lots more...

HIGH VOLUME BENEFITS

- **NO SERVICE CALLS!** - Adheres to most construction substrates including vinyl (PVC) to give a complete water and air tight seal.
- **NO SMELL!** - Better Homeowner Experience
- **NO DRIPPING!** - No Messy Carpets, Jeans or Sills
- **NO POPPING!** - Perfect Bead and No Messy Walls
- **FAST SKINNING & CURE TIME** - Will not allow your work to be damaged once you leave.
- **NO SHRINKAGE** - What you apply is what you get!
- **NO BLACKING OVER TIME** - Mildew & Fungus resistant. Just wipe with a wet cloth to clean.
- **THE PERFECT BEAD** - Thick paste, no air pockets and removable nozzle assure a consistent bead.
- **YOUR INSTALLERS WILL LOVE YOU FOR GETTING DEALSEAL®-N300**

TECHNICAL CHARACTERISTICS


Shore A Hardness	25
Tensile Strength	182 psi
Movement Capability	+/- 25%
Skinning Time	15 min (77°F @ 50% RH)
Tack Free time	10 min (77°F @ 50% RH)
Cure Time	24 hours (77°F @ 50% RH)
Full Cure	2-4 days (77°F @ 50% RH)
Specific Gravity [g/cm ³]	1.00 (Clear) 1.20 (Color)
Application Temp.	40° F to 104° F
Service Temperature	-40° F to +305° F
Modulus, 100% Elongation	0.45 MPa
Elongation at Break	500%
Elastic Recovery	> 85%
Life Expectancy	30+ years
Corrosion-Nonferrous Metal	None

PACKAGING & STORAGE

- DEALSEAL®-N300 is supplied in standard size cartridges with removable nozzles, 24 cartridges per case & 56 cases per skid (1,344 cartridges/pallet).
- DEALSEAL®-N300 has a shelf life of 12 months stored in a dry place at or below +25°C in its original container.

DIRECTIONS FOR USE

- Surfaces should be clean, dry and free of dust or grease.
- Apply sealant firmly into joint or corner to provide a solid fill.
- Tool down using spatula or stick dipped in soapy water.
- Wait 24 hours before exposure to water.
- Do not use in area confined from atmospheric moisture, that may bleed oils or solvents, or areas where painting is required.

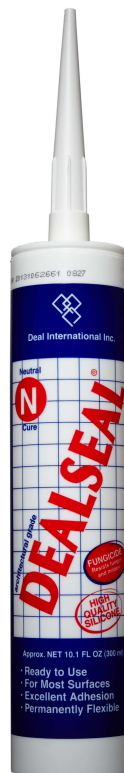

FOR ORDERING:

DEAL International Inc. • P.O. Box 10088; Rochester NY, 14610 • www.DIIHQ.com
Tel: (585) 288-4444 • Order Fax: (585) 444-1456 • Email: orders@diisoft.com

NOTICE TO PURCHASER: DEAL International Inc. warrants its products to conform to their published specifications. The user shall determine the suitability of the product to their particular application. THE FOREGOING WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES EXPRESSED OR IMPLIED, INCLUDING THOSE OF THE MERCHANTABILITY OR FITNESS FOR ANY PURPOSE NOT EXPRESSLY SET FORTH HEREIN. Manufacturer's and seller's liability for damage hereunder shall not exceed the purchase value of the goods used. IN NO EVENT SHALL MANUFACTURER OR SELLER BE RESPONSIBLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF OR IN CONNECTION WITH THE USE OF THIS PRODUCT BY BUYER, BUYER'S USER, OR ANY OTHER PERSON. Notification of claim must be sent in writing to DEAL International Inc.